

## Specifications

Max. working pressure	250 bar
Weight	350 kg
Working volume	98 L
Total volume	106 L
Max. cyl. load (start tipping)	440 kN

## Max. pump flow

With KO <sup>1</sup>	220 L/min
Without KO <sup>1</sup>	190 L/min
With KO <sup>1</sup> below -20°C	154 L/min
Without KO <sup>1</sup> below -20°C	133 L/min

## Tipping time

With KO <sup>1</sup>	27 sec
Without KO <sup>1</sup>	31 sec
With KO <sup>1</sup> below -20°C	39 sec
Without KO <sup>1</sup> below -20°C	44 sec
Allowable lowering time	21 sec

Extension	1	2	3	4	5	6	7	Total
Effective diameter [mm]	179	157	137	118				5605
Stroke* [mm]	1380	1405	1410	1410				

## Technical notes

- This cylinder is a lifting device only.
- It should not be used as a structural member and should not be subjected to side loads.
- Tipping valve must have a pressure relief at the cylinder port set not higher than max. working pressure.
- Verify max. cyl. load.
- Working temperature range is between -40°C and +80°C.
- Max. duration of extension is 0.5 hours (excluded hard chromed stages).
- Cylinder is painted red (RAL3020) with a min. thickness conforming to the 480 hours neutral salt spray test as per ISO 9227.
- <sup>1</sup> Hyva knock-off.


## Related documentation

Bracket options: 015BRA10, 015BRA12, 015BRA15

Mounting instructions: CYL-0030

Oil specifications: OIL-0011  
Spec sheet explanation: CYL-0041

## Tipping weight



BL	body length
OH	rear overhang
Ycog	vert. pos. centre of gravity
Qo	pivot length
C	bracket length
At	tipping angle
	stroke x 60 / Qo

BL [mm]	7700				7300				6900	
OH [mm]	400	700	1000	400	700	1000	400	700	1000	
At [°]	44	46	48	47	49	51	50	52	55	
Ycog [mm]										
	400	74	80	87	77	83	92	80	88	99
	700	79	86	95	82	91		87	97	
	1000	84	93		89			95		

Tipping weight [ton] at maximum pressure of 250 bar for a vertically mounted cylinder and C is 229 mm

For detailed tipping calculations please refer to: <https://tipper.hyva.com>

# Alpha series - Front end cylinder with outer cover




FC A179-4-05605-009-K0343


Item no.

71027440P02


Pos.	Part no.	Description	Qty.
C01	71839040	DUST COVER FC LOW 15-244	1
C02	71736634P02	COVER 242-1445 PIN60 A360 SPH LOCK	1
C03	01702956 K	WASHER M48 DIN 125B ZP	1
C04	01702907 K	TOPNUT NYLOC M48x3 DIN 985 ZP	1
C05	01791941	O-RING COVER D.242	1
C06	15014550 K	BOLT HSHC M12X30X1.75 Q8.8 DIN 912 ZP	1
P01	70484640	PISTON MN2 H 118-1652-HD	1
P02	70207118 K	SLIDER MN 118 (2 x 1/2) A35	1
P03	70216118 K	OUTER STOPRING MN 118 A22	2

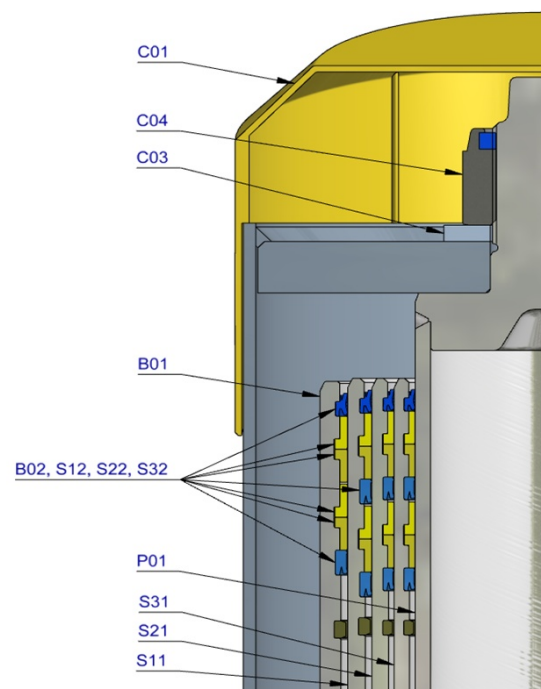

S31	70675640	STAGE MN2 137-1640-HD	1
S32	70202137 K	PACKSET MN 137 TANDEM SEAL	1
S33	70207137 K	SLIDER MN 137 A35	1
S34	70216137 K	OUTER STOPRING MN 137 A22	2
S35	70217137 K	LIFTRING MN 137 A22	1

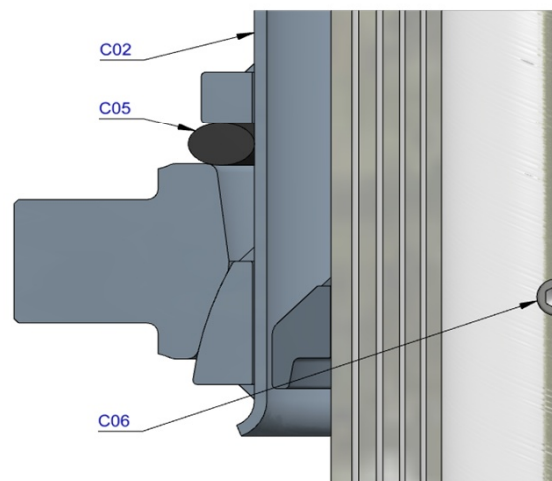

S21	70676640	STAGE MN2 157-1640-HD	1
S22	70202157 K	PACKSET MN 157 TANDEM SEAL	1
S23	70207157 K	SLIDER MN 157 A35	1
S24	70216157 K	OUTER STOPRING MN 157 A22	2
S25	70217157 K	LIFTRING MN 157 A22	1

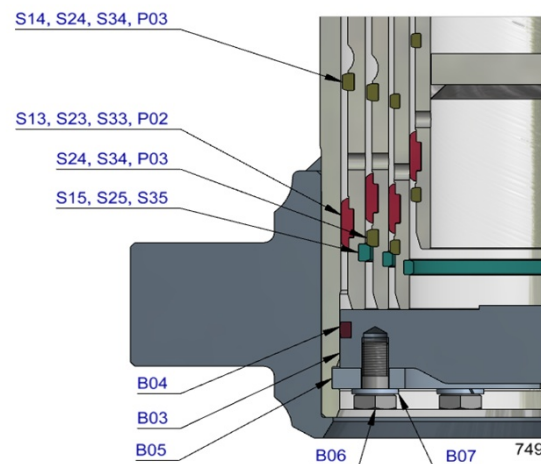

S11	70677640	STAGE MN2 179-1640-HD	1
S12	70202179 K	PACKSET MN 179 TANDEM SEAL	1
S13	70207179 K	SLIDER MN 179 A35	1
S14	70216179 K	OUTER STOPRING MN 179 A22	1
S15	70217179 K	LIFTRING MN 179 A22	1

B01	70378655R1345	BASE MN2 202-1691-4/4BSAE-190-C242-HD	1
B02	70203202 K	PACKSET MN 202	1
B03	70225365	BOTTOM PLATE MN2 202	1
B04	70270202 K	SEAL BOTTOM PLATE MN 202	1
B05	70220205	LOCKING PLATE MN2 202	3
B06	01732020 K	BOLT HEX M12X25X1.25 SET 6 PCS	1
B07	01732523 K	WASHER SPRING M12 SET 6 PCS	1

## Seal kit complete

	71907741 K	Consists of all packsets with packset grease and O-rings	
--	------------	--	--

## Notes

The inner stopring is pre-mounted in the grooves on spare bases and stages. Therefore, when ordering new tubes, it is not required to order inner stoprings separately.

For repair instructions see: CYL-0040. Serial no. is located on type plate and near type plate support.